

SlidingDOOR

«single & double»



The RF-sliding door from IMEDCO is the ideal solution in limited space. This door allows you an comfortable and elegant access to the MR room. Whether double-leaf or single-leaf, the function is ensured by an electro-pneumatic control. The door can be opened or closed at any time from inside and outside with the operating consoles. Because we care about security, the door can always be unlocked mechanically in an emergency case. The flat threshold allows barrier-free access. The white melamine resin decorative surface ensures aesthetics and purity.


IMEDCO[®]



Double sliding door:


Dimension: **W** = 2000 mm or 2400 mm, **H** = 2100 mm

Note: symmetrical double leaf

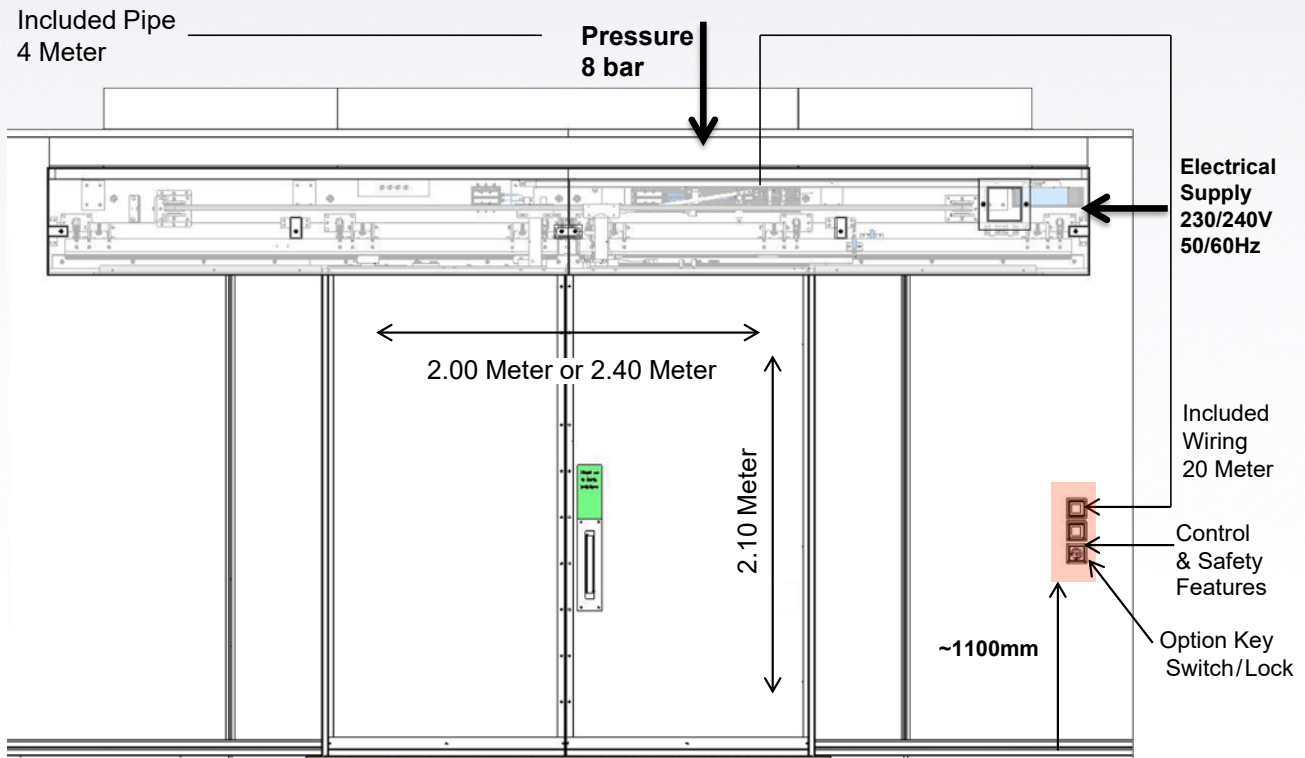

Single sliding door:

Dimension: **W** = 1200 mm or 1400 mm, **H** = 2100 mm

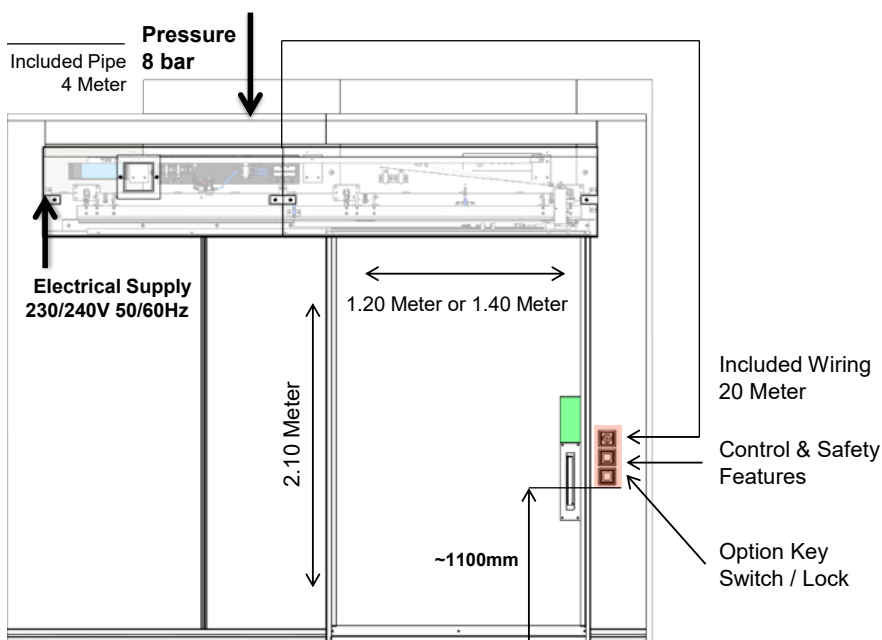

Features and your benefits

- RF shielding attenuation according to MR specifications
- Stepless threshold provides barrier-free access
- Automatic operation
- Low maintenance costs
- Mechanical unlock in emergency case

Preconditions

- Operating pressure: 8 bar
- FAD 34 l/min
- Working pressure: 5 bar
- Dry and dust free pressure air (no water/oil)
- According to ISO 8573-1, Class 4
- Power supply 230/240V 50/60 Hz